

Hyperbaric Communication



C-Tecnic Hyperbaric Chamber Intercom

Half Rack x 3U High
Weight 3.5 Kgs
Power Input 12-24 VDC




AMCOM - Single Lock Chamber Communication

Dimensions: 17.2 cm x 27.3 cm x 17.7
Weight: 5.2 kg
Power Supply: 90-264 VAC, 50-60 Hz



AMCOM - Double Lock Chamber Communication

Dimensions: 20.3 cm x 25.7 cm x 19.1
Weight: 6.4 kg
Power Supply Voltage: 12 VDC Nominal

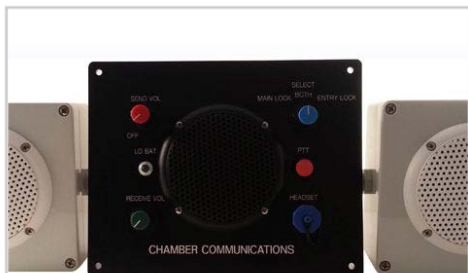

Two Channel Chamber Comms

Audio output: 5 watts intermittent
Weight 1,5 Kg
Power supply: 12 Volts DC rechargeable battery



SOUND POWERED TELEPHONE

Sound powered telephone handset for inside Decompression Chambers.

Technical Diving Equipment Pomtec BV

Conradweg 22
4612PD Bergen op Zoom
The Netherlands

T: +31 164 745500
F: +31 164 745599

E: sales@pomtec.com
I: www.pomtec.com